

SECTION RECORD CORNER

SECTION 11 TOWNSHIP 16 RANGE 4

DATE: 8-16-06

PARTY CHIEF: Wilcoxon

CREW: \_\_\_\_\_

TYPE OF MARKER: Harrison


METHOD OF ESTABLISHMENT: County: 5-5-01

IN. S.P.C. E ZONE NAD '83

NAME: 16041101

N: 511499.0080(m)

E: 65892.1870(m)

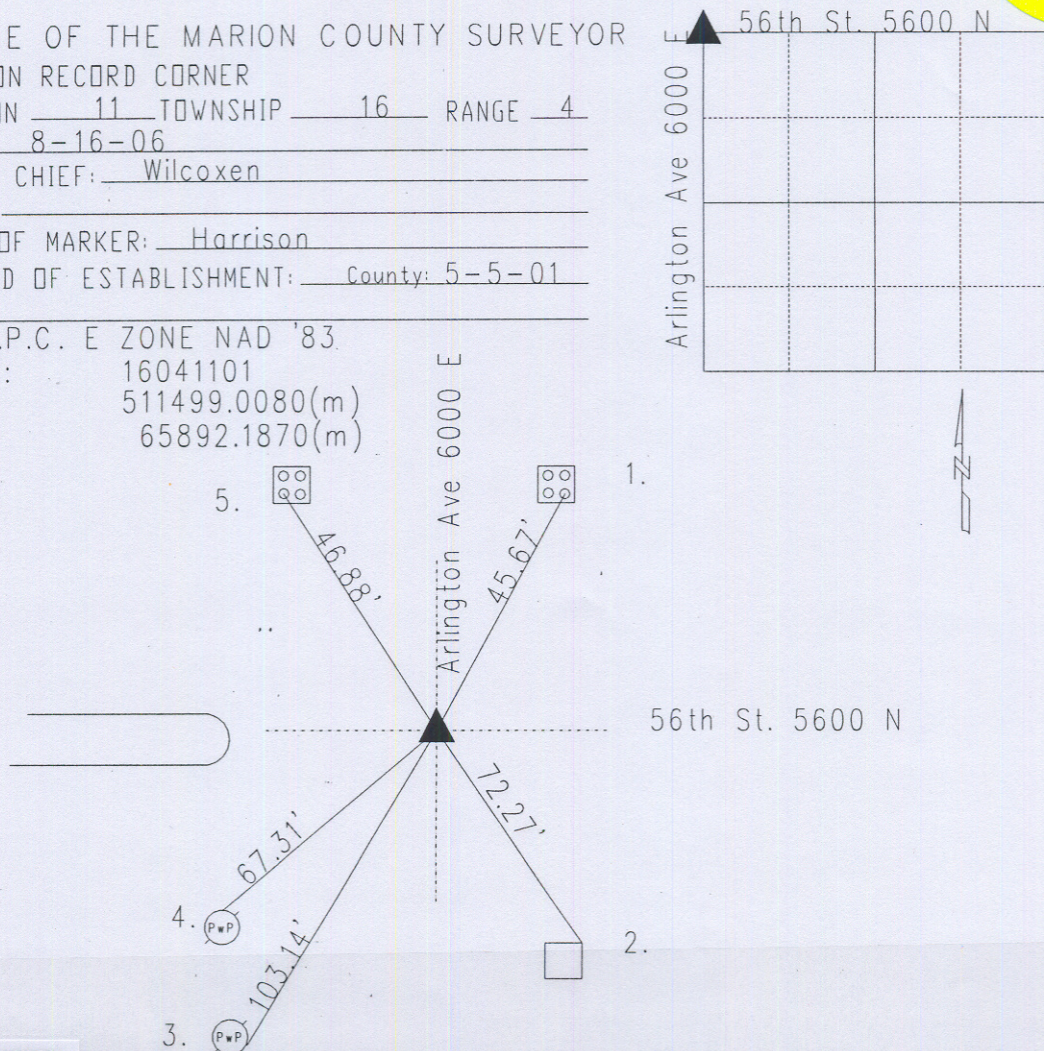

16041101 NW corner

CORNER HISTORY: Corer originally set as a post in 1820 by John Hendricks with witness: 14" sugar N 14 E 33 links; 12" elm S 21 W 33 links per Marion County Atlas pg. 11. Reference dated 11-27 ? called witness elm (no size) N 23 W 61 links; rock S 42 E 47 links per Lawrence Township Legal Survey Book pg. 20. A survey by John J. Griffith dated 8-28-1919 called ran NWQ out to D.A. survey per Lawrence Township Legal Survey Book pg. 20. A survey dated 12-5-1895 by John V. Coyner called rock found said set by others in the SW corner of 2-16-4 per Lawrence Book pg. 42. Reference dated 5-23-1953 called stone found also had newer ties by others called for nail w/bw. Reference dated 12-09-75 by Wilcoxen called bolt w/washer found. Reference dated 3-10-80 by Wilcoxen called road nail found. Reference dated 8-21-96 by Kiste called brass plug in steel box found. Reference dated 5-5-01 by Whiteside called brass plug found 2" down. Reference dated 1-16-04 by Wilcoxen called brass plug in steel box found. Reference dated 8-14-06 by Wilcoxen called found brass plug in steel box down 3". Set Harrison where the brass plug was, no other points were found.

were found.		DISTANCE	DESCRIPTION
1.	45.67'	Cut 'x' SF-bolt traffic signal base	
2.	72.27'	NF corner of concrete signal control box base	
3.	103.14'	Mag nail w/bw F PwP#102-345 4"up	
4.	67.31'	Mag nail w/bw N PwP#101-345 B 4"up	
5.	46.88'	Cut 'x' SW bolt of traffic signal base	